



## AL.12.11/..

- high edge protection
- visually appealing

### FEATURES

perforated bearing legs guarantee the best connection to the substrate/covering

### APPLICATIONS

shopping centres, railway stations, airports, residential, office and administration buildings

### MATERIAL


aluminium, K/VA foam material in the central section

### COVERING TYPES

screed, natural and stone slabs

### FORMED PARTS

corner piece, T-piece, cross piece

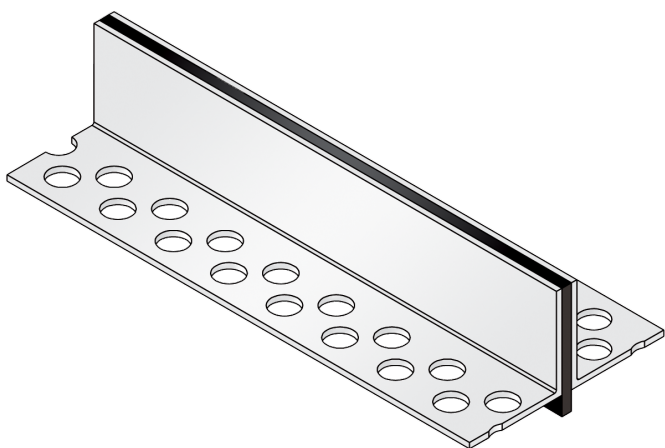


### TECHNICAL DATA

Movement horizontal:	2 mm ( $\pm 1$ mm)
Visible width:	11 mm
Material/sheet thickness:	3 mm
Load rating:	wheel load 600 kg up to $\varnothing$ 150 mm, B = 100 mm
Supply length:	3 mtr
Color of expansion insert:	schwarz

### DESIGNS

ARTICLE NO.	PROFILE HEIGHT <sup>(h)</sup>
AL.12.11/20	20 mm
AL.12.11/30	30 mm
AL.12.11/40	40 mm
AL.12.11/50	50 mm
AL.12.11/60	60 mm
AL.12.11/80	80 mm
AL.12.11/100	100 mm

Special heights on request.

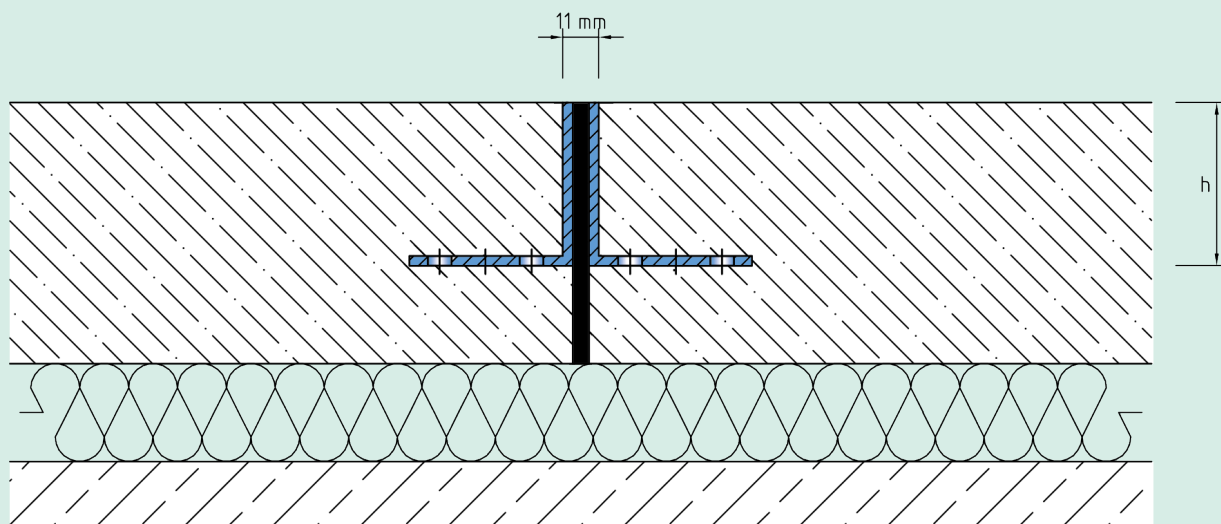

AL.12.11

Subject to technical change without notice.