



AL.1.25/..

- replaceable flexible insert
- narrow visible surface
- stable aluminium joists

FEATURES

expansion insert can be replaced anytime, abrasion, weather and temperature resistant (-40°C bis +120°C), punched bearing legs guarantee best connection to the subgrade/covering.

APPLICATIONS

shopping centres, railway stations, airports, exhibition halls, residential, office and administration buildings

MATERIAL

aluminium, synthetic rubber flexible insert (EPDM)

COVERING TYPES


coating, screed, natural and stone slabs

FORMED PARTS

corner piece, T piece, cross piece

NOTES

In case of mastic asphalt, please request a technical consultation.

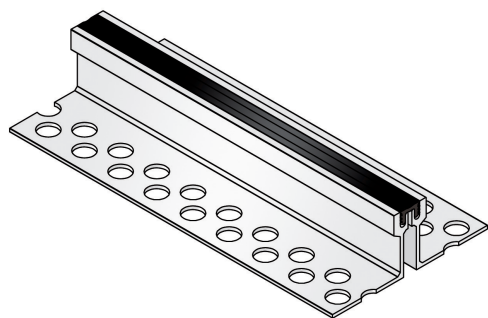


Technical data

Movement horizontal:	4 mm (±2 mm)
Movement vertical:	2 mm (±1 mm)
Visible width:	25 mm
Maximal joint width:	20 mm
Load rating:	wheel load 700 kg up to Ø 150 mm, B = 100 mm
Supply length:	3 mtr
Color of flexible insert:	black or grey

Designs

Article No.	Profile height (h)	Recess (WxD)
AL.1.25/30	30 mm	160 x 40 mm
AL.1.25/45	45 mm	160 x 55 mm
AL.1.25/60	60 mm	160 x 70 mm

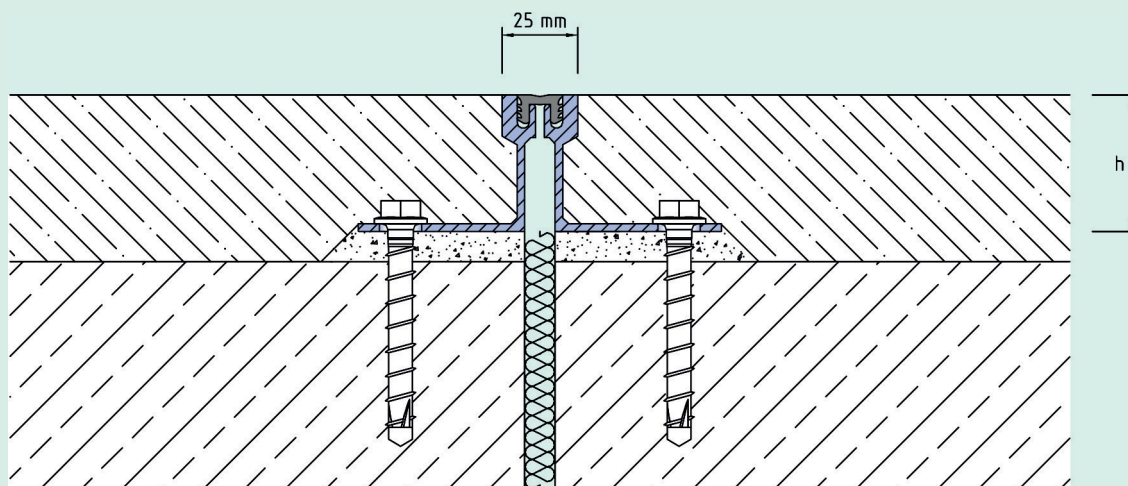

AL.1.25

Subject to technical change without notice.