



AL.1.38/.. G

- replaceable flexible insert
- hygienic, smooth insert
- Non-PVC
- stable aluminium joists

FEATURES

expansion insert can be replaced anytime, abrasion, weather and temperature resistant (-40°C bis +120°C), punched bearing legs guarantee best connection to the subgrade/covering.

APPLICATIONS

residential, office and administration buildings, hospitals and clean rooms

MATERIAL

aluminium, synthetic rubber flexible insert (EPDM)

COVERING TYPES


screed, natural and stone slabs

FORMED PARTS

corner piece, T piece, cross piece, transition floor to wall

NOTES

In case of mastic asphalt, please request a technical consultation.

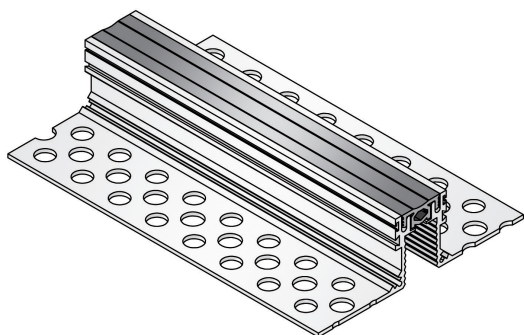


Technical data

Movement horizontal:	6 mm (±3 mm)
Movement vertical:	6 mm (±3 mm)
Visible width:	41 mm
Maximal joint width:	30 mm
Load rating:	wheel load 700 kg up to Ø 150 mm, B = 100 mm
Supply length:	3 mtr
Color of flexible insert:	grey

Designs

Article No.	Profile height (h)	Recess(WxD)
AL.1.38/20 G	20 mm	200 x 30 mm
AL.1.38/33 G	33 mm	200 x 43 mm
AL.1.38/50 G	50 mm	200 x 60 mm
AL.1.38/63 G	63 mm	200 x 73 mm
AL.1.38/83 G	83 mm	200 x 93 mm
AL.1.38/103 G	103 mm	200 x 113 mm
AL.1.38/123 G	123 mm	200 x 133 mm
Special heights on request.		

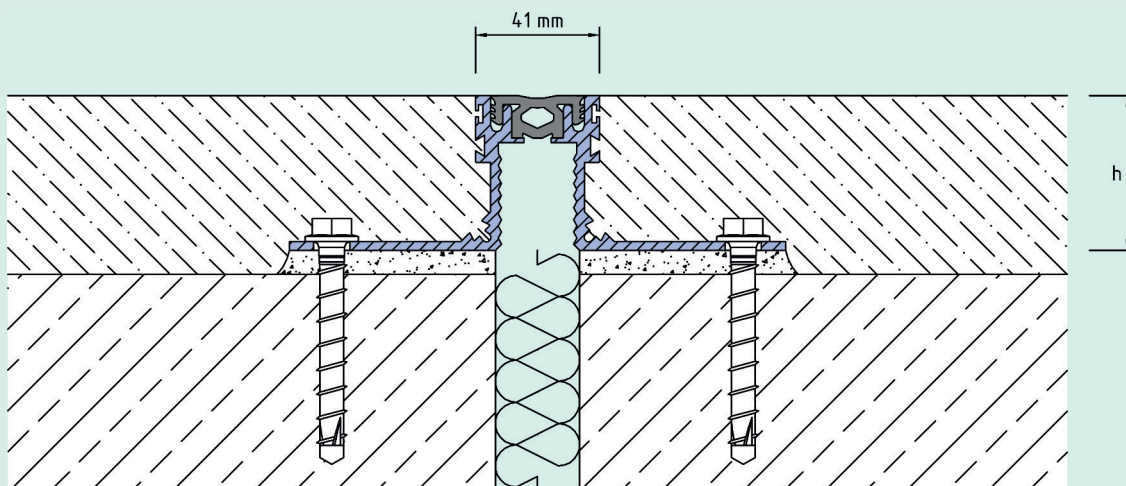

AL.1.38

Subject to technical change without notice.