



## D.S.T.-Fugendübel

- **high load-bearing capacity**
- **continuous load transfer**

### FEATURES

The joint dowel for screeds floors prevents deformation, change of levels, uncontrollable cracks with shrinkage and expansion joints, also with concrete screed flooring.

### APPLICATIONS

residential, office and administration buildings


### COVERING TYPES

screed, screed with upper layer from linoleum, rubber or carpet

### NOTES

Steel quality: St 37

Placeability in both directions in case of shrinking is ensured through the complete plastic sheath coat.

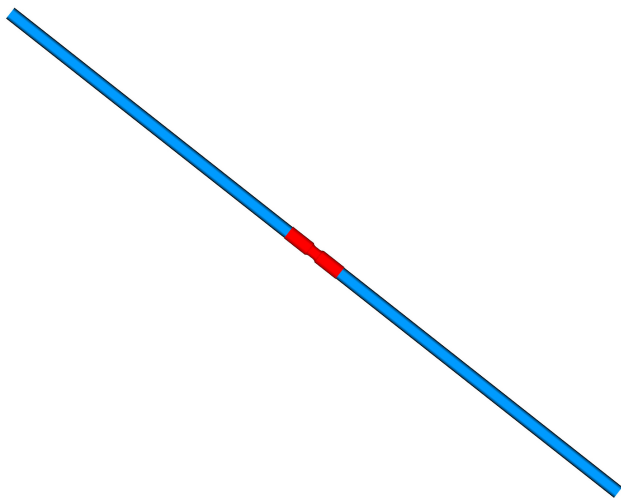


### Technical data

Thickness: 4 mm  
Length: 300 mm

### Designs

Article No.  
D.S.T.-Fugendübel

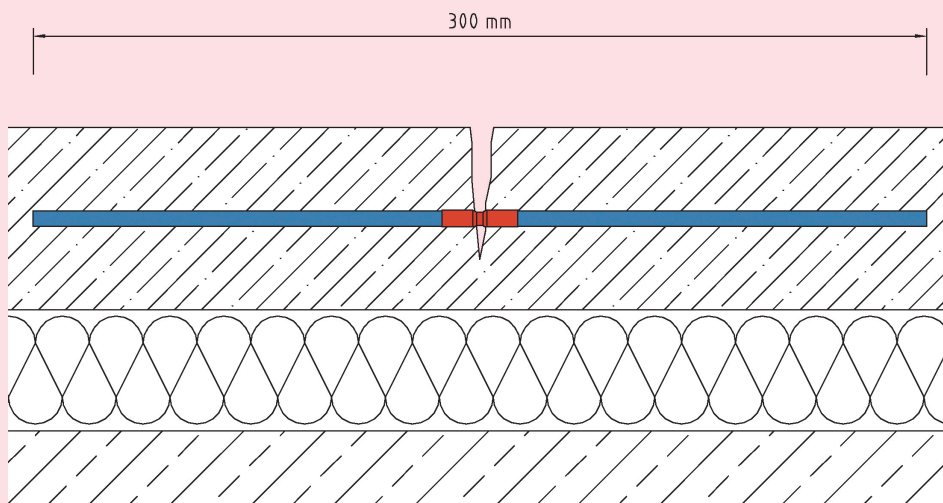

Subject to technical change without notice.

D.S.T.-Fugendübel