




VA.6.45/..

- for heavy loads
- suitable for all types of covering
- visible surface in high-grade steel
- narrow visible surface

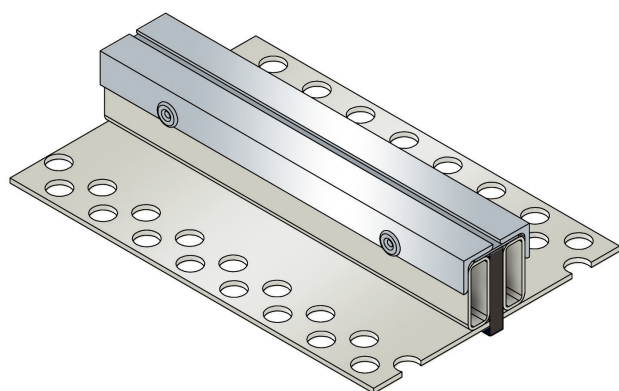

FEATURES

resistant to heavy loads, trafficable by fork-lift trucks, punched bearing legs guarantee best connection to the subgrade/covering.

APPLICATIONS

all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

hot-dip galvanised steel substructure and high-grade steel V2A surface, EVA foam material in the central space

COVERING TYPES

asphalt, coating, concrete, screed, industrial covering, natural and stone slabs

TRAFFICABILITY

industrial trucks (lifting trucks, fork-lifts etc.), passenger car, trucks

FORMED PARTS

corner piece, T piece, cross piece

NOTES


We recommend that the customer applies grout between profile and covering so as to avoid typical hairline cracks.

Technical data

Movement horizontal:	6 mm (± 3 mm)
Movement vertical:	2 mm (± 1 mm)
Visible width:	45 mm
Maximal joint width:	20 mm
Load rating:	wheel load 5000 kg up to \varnothing 150 mm, B = 100 mm
Load rating trucks:	600 kN (DIN 1072)
Load rating forklifts:	150 kN (DIN 1055-3)
Supply length:	3 mtr

Designs

Article No.	Profile height (h)	Recess(WxD)
VA.6.45/30	28 mm	210 x 38 mm
VA.6.45/40	38 mm	210 x 48 mm
VA.6.45/50	48 mm	210 x 58 mm
VA.6.45/70	68 mm	210 x 78 mm

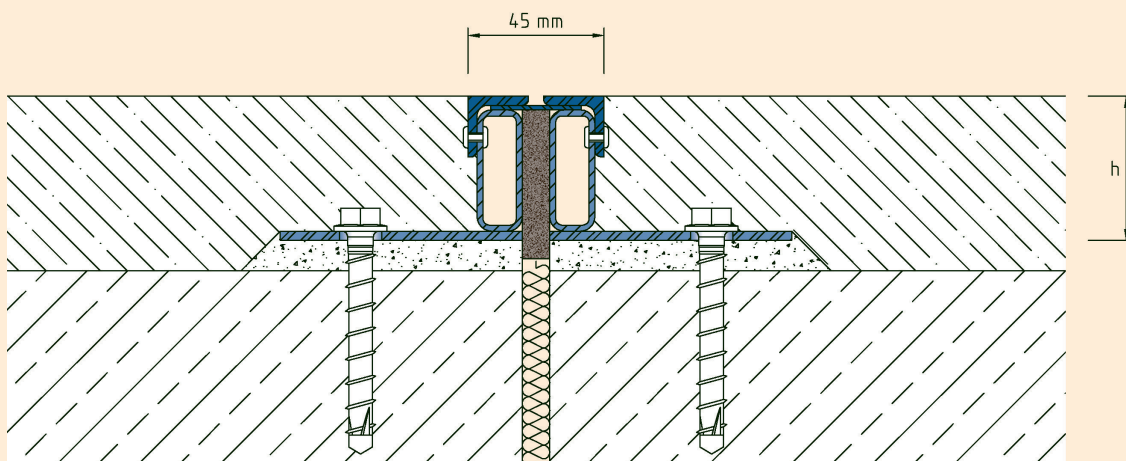

VA.6.45

Subject to technical change without notice.